


高出力LED照明

高輝度水銀灯代替



グレア防止

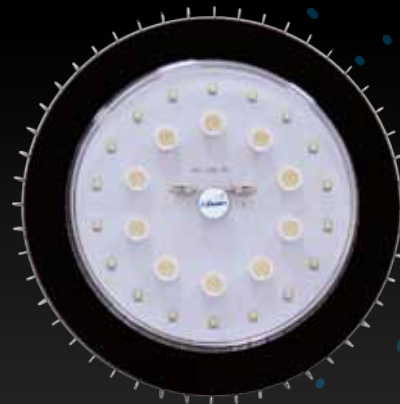

専用棚照明400w代替/特殊なレンズを使用広角(160 x 80)

内蔵電源高輝度100w/15500lm




専用棚照明400w代替/特殊なレンズを使用広角(160 × 80)


内蔵電源高輝度100w/15500lm




比較条件: 設置高: 9.3M
保守率: 0.8
通路幅: 3M
灯間距離: 10M

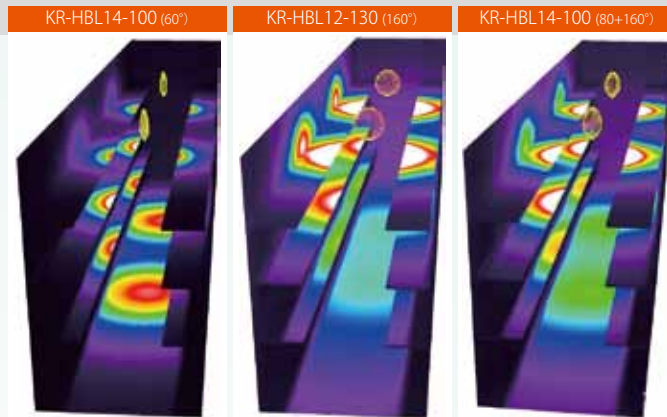



KR-HBL14-100 60° 照度図/配光図

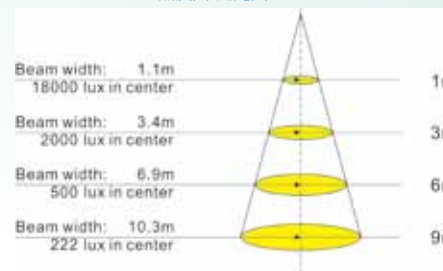

KR-HBL14-100 80° 照度図/配光図

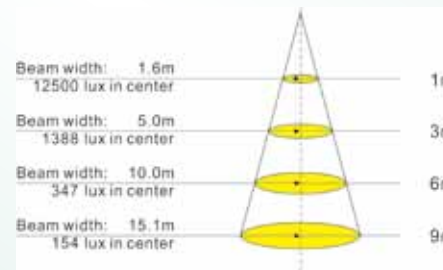

KR-HBL12-130 160° 照度図/配光図

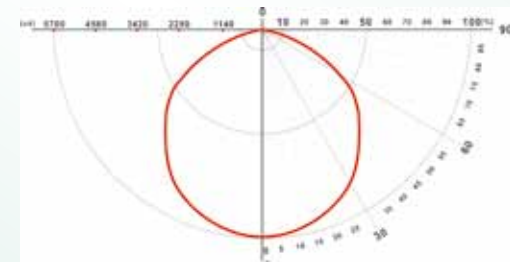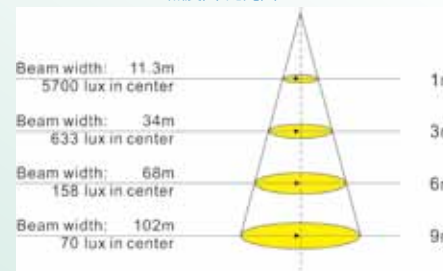

品番	消費電力	色温度	全光束	配光角度	入力電圧	寸法	IP
外蔵電源 KR-HBL12-130	130w	3000K 5000K	20000lm	160°	100-240V	Φ230*275mm	65
内蔵電源 KR-HBL14-100 (棚専用灯)	100w	3000K 5000K	15000lm	80+160°	200-240V	Φ230*275mm	65
内蔵電源 KR-HBL14-100	100w	3000K 5000K	15500lm	160°	200-240V	Φ230*275mm	65
内蔵電源 KR-HBL14-100	100w	3000K 5000K	15000lm	60/80°	200-240V	Φ230*275mm	65
内蔵電源 KR-HBL14(F)-100 (冷凍専用)	100w	3000K 5000K	15500lm	160°	200-240V	Φ230*275mm	65
内蔵電源 KR-HBL14(F)-100 (冷凍専用)	100w	3000K 5000K	15000lm	60/80°	200-240V	Φ230*275mm	65
内蔵電源 KR-HBL14-65	65w	3000K 5000K	12000lm	160°	200-240V	Φ230*275mm	65

E39 水銀灯代替

電源内蔵、工事簡単






防衛省・自衛隊採用


品番	消費電力	色温度	全光束	配光角度	入力電圧	寸法	IP	口金
 KR-ECO80-E39	80w	5500K	6400lm 6400lm 5800lm	45/65/100°	100-277V	(L)272* Φ186mm (S)235* Φ186mm	55	E39
 KR-ECO80K-E39	80w	5500K	8000lm 8000lm 6400lm	45/65/100°	100-277V	(L)272* Φ186mm (S)235* Φ186mm	55	E39
KR-ECO120-E39	120w	5500K	9600lm 9600lm 8700lm	45/65/100°	100-277V	(L)272* Φ186mm (S)235* Φ186mm	55	E39
KR-ECO120K-E39	120w	5500K	12000lm 12000lm 9600lm	45/65/100°	100-277V	(L)272* Φ186mm (S)235* Φ186mm	55	E39
KR-ECO150-E39	150w	5500K	12000lm 12000lm 10500lm	45/65/100°	100-277V	(L)272* Φ186mm (S)235* Φ186mm	55	E39
KR-ECO150K-E39	150w	5500K	8000lm 8000lm 6400lm	45/65/100°	100-277V	(L)272* Φ186mm (S)235* Φ186mm	55	E39
KR-ECO200K-E39	200w	5500K	6400lm 6400lm 5800lm	45/65/100°	100-277V	(L)272* Φ186mm (S)235* Φ186mm	55	E39



KR-ECO200K-E39 明るさ

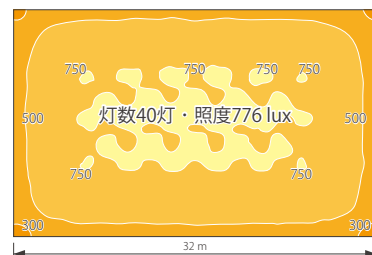

◎保守率0.8 ◎反射率天井70%・壁面50%・床20%
◎消費電力200W ◎色温度5500K ◎角度65° ◎全光束20000lm

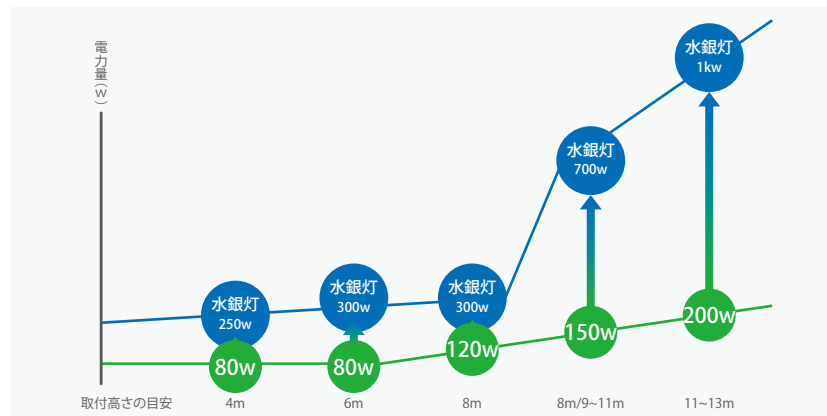


360°全面発光電球 (E39)

屋外密閉灯具適用仕様 / 倉庫用水銀灯も対応



品番	消費電力	色温度	全光束	配光角度	入力電圧	寸法	IP	口金
 KR-TCPL075W27KPAD-J	75w	2700K	7000lm	360°	100-277V	Φ88*246mm	68	E39
 KR-TCPL075W57KPAD-J	75w	5700K	7500lm	360°	100-277V	Φ88*246mm	68	E39


KR-TCPL075W57KPAD-J




KR-BLN72000

KR-LB26

KR-LB26-M36000CMB8/H7



配光図



品番	消費電力	色温度	全光束	配光角度	入力電圧	寸法	口金
  KR-BLN72000	20w	3000K 6000K	2000lm	330°	100-240V	78*(H)200mm	E26
  KR-LB26-M36000CMB8/H7	36w	3000K 6000K	3000lm 3300lm	330°	100-240V	Φ70.5*(H)255.6mm	E26
  KR-LB26-M42000CMB8/H7	42w	3000K 6000K	3500lm 3870lm	330°	100-240V	Φ70.5*(H)255.6mm	E26

有償オプション: E39口金変換アダプタ ※必要な場合はご連絡ください。 ※50w内蔵E39タイプ開発中



ビーム球 / バラストレス電球



KR-DG18K



KR-PAR38/52





KR-CBKL





KR-TLPA63

品番	消費電力	色温度	全光束	配光角度	入力電圧	寸法	IP	口金
 KR-DG18K-E26	16w	2700K 5500K	1300lm 1350lm	30/70°	100-240V	Φ120*(H)132.55mm	65	E26
 KR-PAR3825WE	25w	2700K 6000K	2400lm 2600lm	120°	90-265V	Φ120*(H)132.55mm	65	E26
 KR-PAR5245WE	45w	2700K 6000K	5000lm 5500lm	120°	90-265V	Φ165*(H)223.92mm	65	E39

KR-DG18K-E26



KR-PAR5245WE

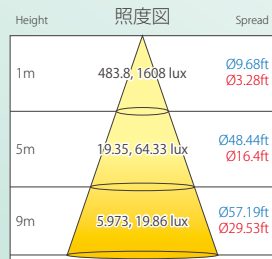

品番	消費電力	色温度	全光束	配光角度	入力電圧	寸法	口金
 KR-CBKL119-Y/W	24w	3000K 6000K	2350lm 2600lm	300°	100-240V	Φ101*150mm	E26
 KR-CBKL201-Y/W	30w	3000K 6000K	2900lm 3200lm	300°	100-240V	Φ101*165mm	E26
 KR-CBKL202-Y/W	36w	3000K 6000K	3600lm 4000lm	300°	100-240V	Φ101*165mm	E26
 KR-TLPA63100W57KCAD-J	100w	5700K	10000lm	120°	100-270V	Φ200*215mm	E39

KR-TLPA63100W57KCAD-J

