



高出力LED照明


投光器



2KWまで
対応可能





品番	消費電力	色温度	全光束	配光角度	入力電圧	寸法	IP
KR-TL200	220w	6500K	21000lm	85×135°	90-305V	(H)366*(W)507*(D)91mm	68
KR-TL250	280w	6500K	26000lm	85×135°	90-305V	(H)366*(W)545*(D)91mm	68
KR-TL300	330w	6500K	31000lm	85×135°	90-305V	(H)606*(W)507*(D)117mm	68
KR-TL350	390w	6500K	36000lm	85×135°	90-305V	(H)606*(W)507*(D)117mm	68
KR-TL400	440w	6500K	41000lm	85×135°	90-305V	(H)606*(W)811*(D)117mm	68
KR-TL500	550w	6500K	51000lm	85×135°	90-305V	(H)606*(W)811*(D)117mm	68
KR-TL600	660w	6500K	61000lm	85×135°	90-305V	(H)606*(W)811*(D)117mm	68

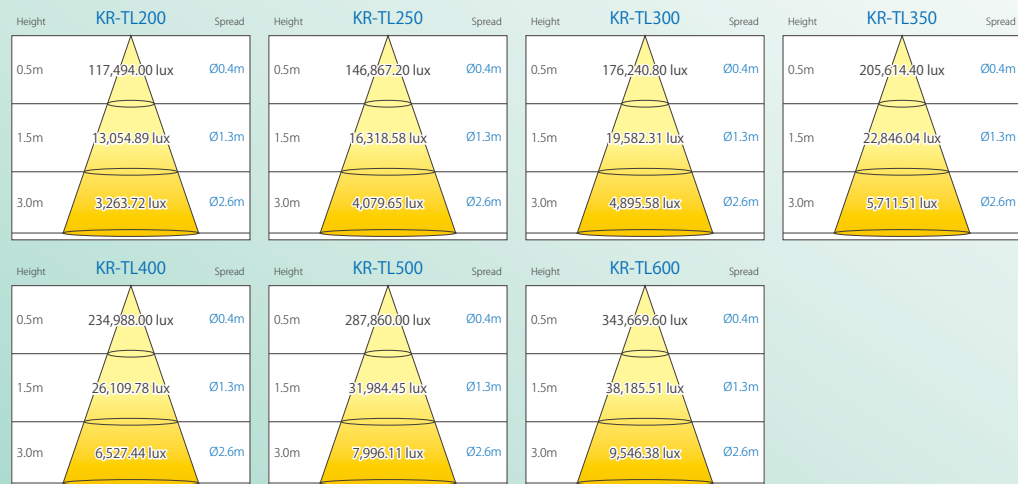




品番	消費電力	色温度	全光束	配光角度	入力電圧	寸法	IP
KR-TLFL72	72.3w	6000K	7100lm	135°	100-277V	(L)372*(W)307*(D)94mm	68
KR-TLFL92	92w	6000K	8600lm	135°	100-277V	(L)400*(W)307*(D)218mm	68
KR-TLFL135	135w	6000K	13200lm	135°	100-277V	(L)400*(W)307*(D)218mm	68

KR-TLFL72

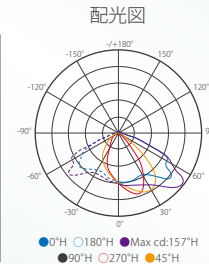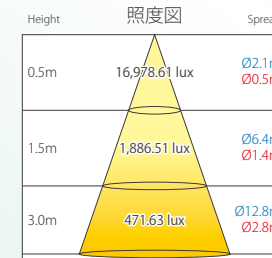




品番	消費電力	色温度	全光束	配光角度	入力電圧	寸法	IP
KR-YR-FS178-W10	10w	6000K	830lm	120°	85-265V	(L)218*(W)314*(D)80mm	65
KR-YR-FS180-W20	20w	6000K	1500lm	120°	85-265V	(L)218*(W)314*(D)80mm	65
KR-YR-FS295-W30	34w	6000K	2650lm	120°	85-265V	(L)218*(W)314*(D)80mm	65
KR-YR-FS355-W50	57w	6000K	4430lm	120°	85-265V	(L)356*(W)332*(D)160mm	65
KR-TLFL075W*KCAY-S	75w	6000K	5300lm	120°	85-265V	(L)356*(W)332*(D)160mm	65
KR-YR-FD430-W80	90w	6000K	7300lm	120°	85-265V	(L)432*(W)379*(D)126mm	65
KR-YR-FD430-W100	110w	6000K	8800lm	120°	85-265V	(L)432*(W)379*(D)126mm	65
KR-YR-FD430-W120	133w	6000K	10600lm	120°	85-265V	(L)432*(W)379*(D)126mm	65

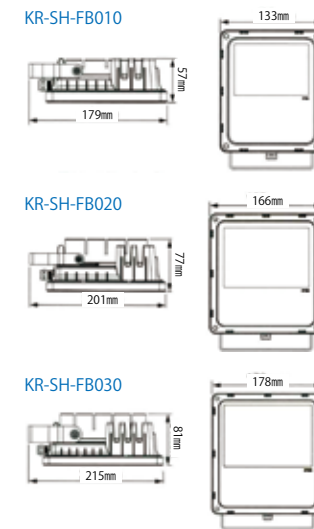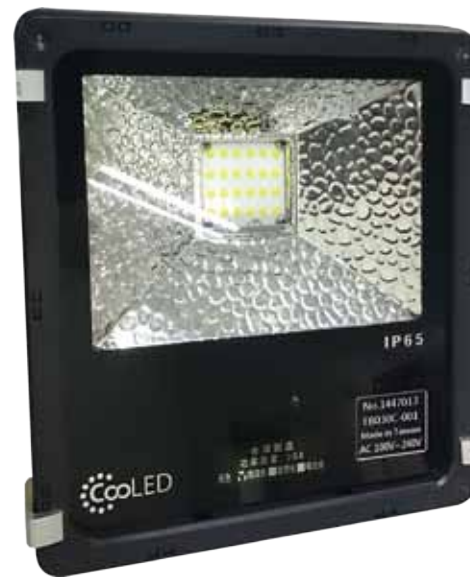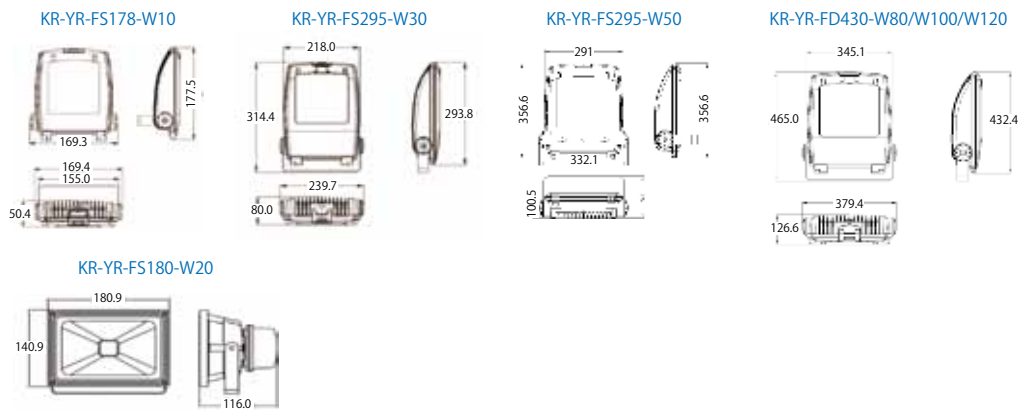

品番	消費電力	色温度	全光束	配光角度	入力電圧	寸法	IP
KR-SH-FB010	10w	5000K	850lm	120°	100-240V	133*179*57mm	65
KR-SH-FB020	20w	5000K	1600lm	120°	100-240V	166*201*77mm	65
KR-SH-FB030	30w	5000K	2500lm	120°	100-240V	178*215*81mm	65
KR-SH-FC060	60w	5000K	6600lm	120°	100-240V	200*261.93*112.77mm	65
KR-SH-FC120	120w	5000K	13200lm	120°	100-240V	250*309.5*182.23mm	65
KR-SH-FC200	200w	5000K	24000lm	120°	100-240V	274*364.5*186.73mm	65
人感センサー KR-SH-BER20W/PIR	20w	6000K	1400lm	120°	85-265V	(L)432*(W)379*(D)126mm	65

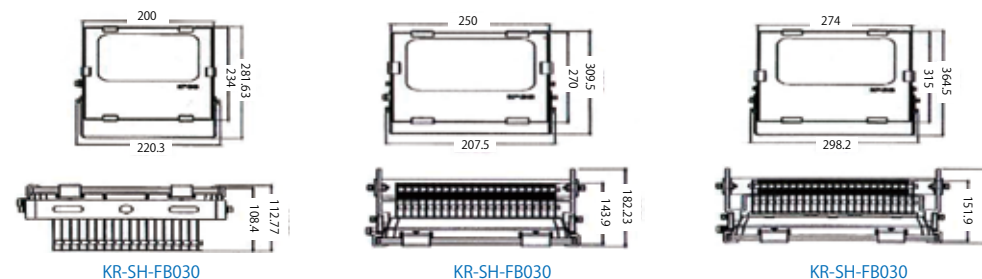


工場灯




品番	消費電力	色温度	全光束	配光角度	入力電圧	寸法	IP
TLHB078W*K*AE-J	78w	3000K 5000K	7150lm 7250lm	15/30/50/60/80°	100-277V	400.9x400.9x132.5mm	66
TLHB100W*K*AE-J	100w	3000K 5000K	9150lm 9250lm	15/30/50/60/80°	100-277V	400.9x400.9x132.5mm	66
TLHB120W*K*AE-J	120w	3000K 5000K	10400lm 10460lm	15/30/50/60/80°	100-277V	400.9x400.9x132.5mm	66
TLHB135W*K*AE-J	135w	3000K 5000K	11500lm 11650lm	15/30/50/60/80°	100-277V	400.9x400.9x132.5mm	66
TLHB145W*K*AE-J	145w	3000K 5000K	12100lm 12140lm	15/30/50/60/80°	100-277V	400.9x400.9x132.5mm	66
TLHB180W*K*AE-J	180w	3000K 5000K	17500lm 17650lm	15/30/50/80°	100-277V	400.9x567.5x132.5mm	66
TLHB200W*K*AE-J	200w	3000K 5000K	19050lm 19200lm	15/30/50/80°	100-277V	400.9x567.5x132.5mm	66
TLHB250W*K*AE-J	250w	3000K 5000K	23000lm 23150lm	15/30/50/80°	100-277V	400.9x567.5x132.5mm	66
TLHB275W*K*AE-J	275w	3000K 5000K	25400lm 25550lm	15/30/50/80°	100-277V	400.9x567.5x132.5mm	66
TLHB270W*K*AE-J	270w	3000K 5000K	25500lm 25650lm	15/30/50/60/80°	100-277V	567.5x567.5x132.5mm	66
TLHB300W*K*AE-J	300w	3000K 5000K	27900lm 28050lm	15/30/50/60/80°	100-277V	567.5x567.5x132.5mm	66


KR-TLHB078/100/120/135W*K*AE-S

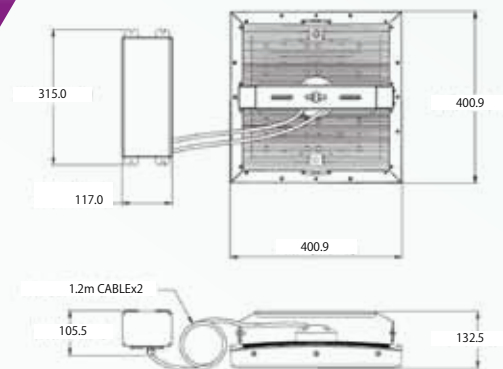

KR-TLHB180/200/250/275W*K*AE-S

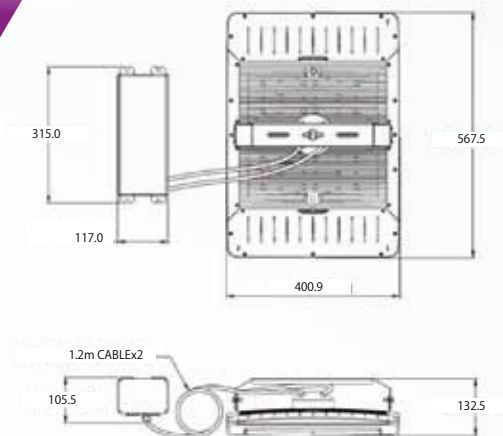





KR-TLHB270/300W*K*AE-S

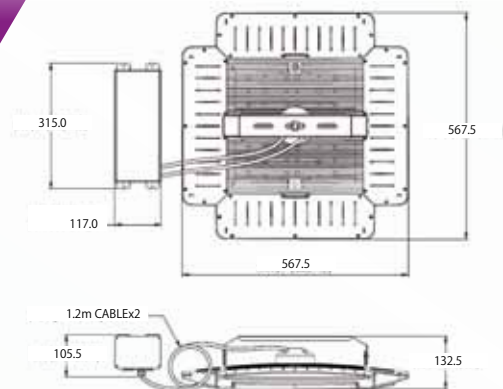

工場灯



品番	消費電力	色温度	全光束	配光角度	入力電圧	寸法	IP
KR-TLHB058W65K*AY-C	58w	6000K	5300lm	45/90/120°	90-295V	Φ500x114mm	65
KR-TLHB069W65K*AY-C	69w	6000K	6300lm	45/90/120°	90-295V	Φ500x114mm	65
KR-TLHB090W65K*AY-C	90w	6000K	8200lm	45/90/120°	90-295V	Φ500x461mm	65
KR-TLHB110W65K*AY-C	110w	6000K	10000lm	45/90/120°	90-295V	Φ500x461mm	65
KR-TLHB130W65K*AY-C	130w	6000K	11800lm	45/90/120°	90-295V	Φ500x511mm	65
KR-TLHB161W65K*AY-C	160w	6000K	16700lm	45/90/120°	90-295V	Φ500x511mm	65
KR-TLHB196W65K*AY-C	196w	6000K	17000lm	45/90/120°	90-295V	Φ500x561mm	65
KR-TLHB214W65K*AY-C	214w	6000K	21400lm	45/90/120°	90-295V	Φ500x561mm	65

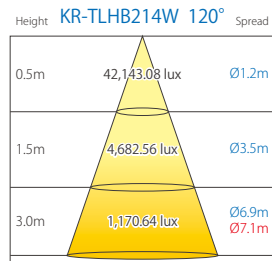

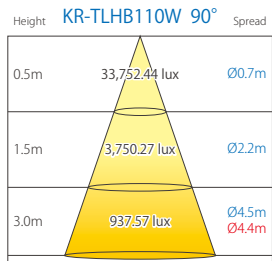


街路灯






品番	消費電力	色温度	全光束	配光角度	入力電圧	寸法	IP
KR-TLSL040W50K8AN-C	40w	5000K	3700lm	50°	100-277V	507x285x159mm	65
KR-TLSL060W50K8AN-C	60w	5000K	5500lm	50°	100-277V	507x285x159mm	65
KR-TLSL070W50K8AN-C	70w	5000K	6400lm	50°	100-277V	507x285x159mm	65
KR-TLSL080W50K8AN-C	80w	5000K	7300lm	50°	100-277V	507x285x159mm	65

KR-TLSL040W50K8AN-C 明るさ

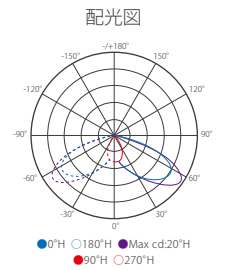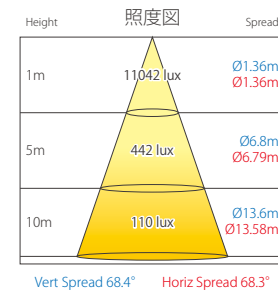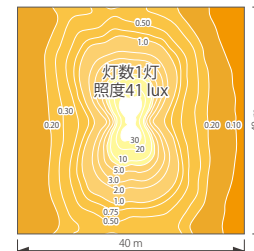

◎保守率0.8 ◎反射率天井70%・壁面50%・床20%
◎消費電力40W ◎色温度5000K ◎角度50° ◎全光束3700lm

KR-TLSL080W50K8AN-C 明るさ

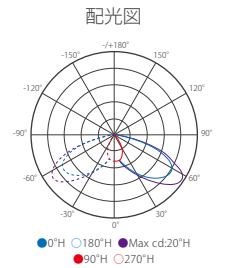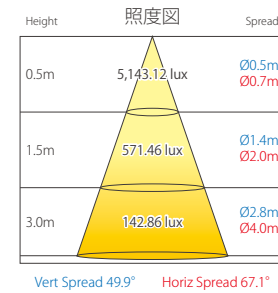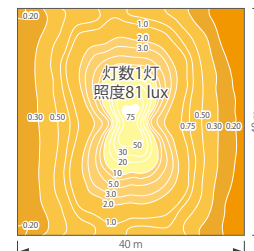

◎保守率0.8 ◎反射率天井70%・壁面50%・床20%
◎消費電力80W ◎色温度5000K ◎角度50° ◎全光束7300lm